


## 標準:


- 時尚摩登設計
- 全部模組化
- 標準自動熄火保護
- 高效燃氣焗爐
- 可調節高度的前腳和後輪
- 更高熱能：28.00MJ/h每爐膽；20.00MJ/h每鐵板
- 可拆卸爐膽蓋，鑄鐵爐花板，垃圾托盤，便於清洗
- 整體不鏽鋼表面，乾淨衛生容易清潔
- 鐵板選擇 – 300mm、600mm、900mm機械拋光，16mm厚，配備壓電晶體點火
- 為整合廚房設計的集鐵板，燒烤，煲仔爐和吐司爐於一體的產品

## Feature:


- Fully modular modern design
- Removable drip tray
- Precision brass valving
- Standard flame failure
- Removable cast iron trivets
- Heavy duty oven thermostat: 100 °C to 340 °C adjustable range.
- Even high heat input: 28.00MJ/h Cooktop  
20.00MJ/h Grill Plate
- Removable burner cap for ease of cleaning
- Height adjustable front feet and rear rollers
- Complete stainless steel exterior including side panels, hygienic and easy to keep clean
- Griddle options – 300mm, 600mm and 900mm machine finished 16mm thickness, with piezo ignition
- Modular design to suit Fryers, Grills, Barbecues and Cooktops for a uniform kitchen



**LKKOB4D + O**  
200MJ/hr, 56kW




**LKKOB4C + O**  
164MJ/hr, 46kW




**LKKOB4B + O**  
128J/hr, 36kW



**LKKOB4A + O**  
92MJ/hr, 26kW



Open Burners:  
28MJ/hr 7.7W each  
Griddle Burners:  
20MJ/hr 5.5W each  
Oven:  
32MJ/hr 6.4W

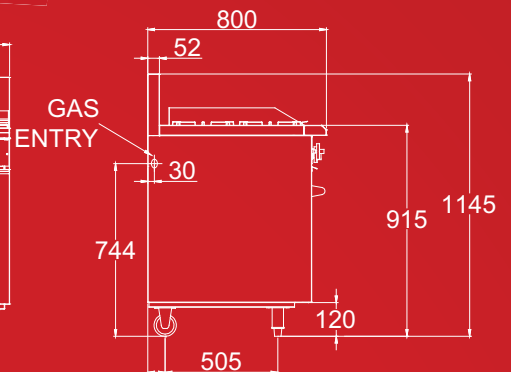

Oven Dimensions  
664mm x 590mm x 378mm  
Rack size  
647mm x 470mm  
Rack positions: 4

## Optional Extras:

- Other combinations available on request
- Pilot flame failure upgrade per open burner (Manual Pilot Ignition)
- Additional oven racks
- Joining strips
- \*Options must be specified at the placement of order

## Note:

- Flame failure standard on open burners (Manual Ignition)
- All units supplied with Natural gas regulator 3/4" BSP female
- Available in Natural gas and ULP Gas, please specify when ordering.
- All units supplied with Gas Regulator.
- As product improvement is an on going process we reserve the right to change specifications or design without notice.



Australia

Phone:1300 655 715 Fax:(+61) 02 8587 0033  
47 George Street, Granville, NSW2142, Australia  
[www.lkk.net.au](http://www.lkk.net.au)

New Zealand

Phone:(+64) 09 837 2960 Fax:(+64) 09 836 9168  
18 Paramount Drive, Henderson, Auckland  
[www.lkk.co.nz](http://www.lkk.co.nz) [sales@lkk.co.nz](mailto:sales@lkk.co.nz)

# GAS OVEN RANGE



LKK自1988年開始研發、製造商用燃氣廚具。


新OB系列包含煲仔爐，鐵板燒，燃氣焗爐及吐司爐，可靈活組合，節約空間，滿足不同廚房佈局要求。

我司全新系列產品根據高效、穩定、可靠這三個原則設計和製造，同時我們的價格具有相當強的市場競爭力。

LKK has been designing and manufacturing commercial cooking equipment since 1988. The OB series include open burner, griddle, standard oven and toaster. It comes with a variety of configurations which is designed to save space and fit in different kitchen layouts.

This new range is designed and built to meet three main criteria:

- Stable and reliable.
- Excellent in performance.
- Our price is highly competitive.



**LKKOB4D + O**  
135.2MJ/hr, 37.5kW




**LKKOB4C + O**  
99.2MJ/hr, 27.5kW



**LKKOB4B + O**  
63.2MJ/hr, 17.5kW



Open Burners:  
28MJ/hr 7.7W each  
Griddle Burners:  
20MJ/hr 5.5W each  
Oven:  
23.2MJ/hr 6.4W

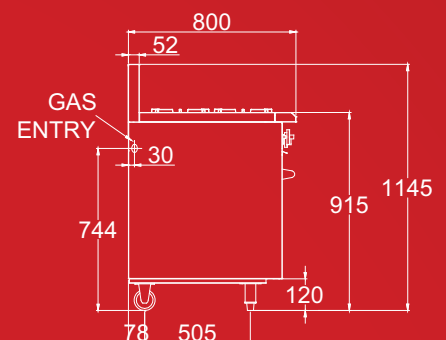

Oven Dimensions  
495mm x 590mm x 378mm  
Rack size  
478mm x 470mm  
Rack positions: 4

## Optional Extras:

- Other combinations available on request
- Pilot flame failure upgrade per open burner (Manual Pilot Ignition)
- Additional oven racks
- Options must be specified at the placement of order

## Note:

- Flame failure standard on open burners (Manual Ignition)
- All units supplied with Natural gas regulator 3/4" BSP female
- Available in Natural gas and ULP Gas, please specify when ordering.
- As product improvement is an on going process we reserve the right to change specifications, or design without notice.